

UTILITY PATENT APPLICATION TRANSMITTAL
(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No. : 36132/JWE/M618
Inventor(s) : Kenneth W. Baun, et al.
Title : TELESCOPE SYSTEM HAVING AN INTELLIGENT MOTOR
CONTROLLER
Express Mail Label No. : EL447087779US

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Date: October 25, 1999

1. ☒ **FEE TRANSMITTAL FORM** (Submit an original, and a duplicate for fee processing).

2. **IF A CONTINUING APPLICATION**

☐ This application is a of patent application No. .

☒ This application claims priority pursuant to 35 U.S.C. §119(e) and 37 CFR §1.78(a)(4),
to provisional Application No. 60/105,660, filed October 26, 1998 (Docket No. 33089).

3. **APPLICATION COMPRISED OF**

Specification

40 Specification, claims and Abstract (total pages)

Drawings

8 Sheets of drawing(s) (FIGS. 1 to 12)

Declaration and Power of Attorney

☒ Newly executed

☐ No executed declaration

☐ Copy from a prior application (37 CFR 1.63(d))(for continuation and divisional)

4. ☐ **Microfiche Computer Program** (Appendix)

5. ☐ **Nucleotide and/or Amino Acid Sequence Submission** (if applicable, all necessary)

☐ Computer Readable Copy

☐ Paper Copy (identical to computer copy)

☐ Statement verifying identity of above copies

6. **ALSO ENCLOSED ARE**

☐ Preliminary Amendment

☐ A Petition for Extension of Time for the parent application and the required fee are
enclosed as separate papers

☐ Small Entity Statement(s)

☐ Statement filed in parent application, status still proper and desired

☐ Copy of Statement filed in provisional application, status still proper and desired

UTILITY PATENT APPLICATION TRANSMITTAL
(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.: 36132/JWE/M618

- ☒ An Assignment of the invention with the Recordation Cover Sheet and the recordation fee are enclosed as separate papers
- ☐ This application is owned by pursuant to an Assignment recorded at Reel , Frame
- ☐ Information Disclosure Statement (IDS)/PTO-1449
- ☐ Copies of IDS Citations
- ☐ Certified copy of Priority Document(s) (*if foreign priority is claimed*)
- ☐ English Translation Document (*if applicable*)
- ☒ Return Receipt Postcard (MPEP 503) (should be specifically itemized).
- ☐ Other


7. CORRESPONDENCE ADDRESS

CHRISTIE, PARKER & HALE, LLP, P.O. BOX 7068, PASADENA, CA 91109-7068

Respectfully submitted,

CHRISTIE, PARKER & HALE, LLP

By

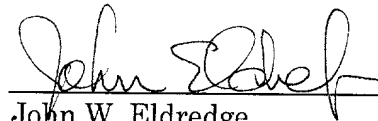

John W. Eldredge
Reg. No. 37,613
626/795-9900

JWE/mg

1 36132/NEC/M618

TELESCOPE SYSTEM HAVING AN INTELLIGENT MOTOR CONTROLLER

5 PRIORITY CLAIM

This application takes priority from provisional patent Application Serial No. 60/105,660, filed October 26, 1998 entitled "Telescope System Having An Intelligent Motor Controller", the entire contents of which are expressly
10 incorporated herein by reference.

RELATED APPLICATIONS

This patent application is related to co-pending patent application entitled UPGRADEABLE TELESCOPE SYSTEM and to co-
15 pending patent application entitled FULLY AUTOMATED TELESCOPE SYSTEM WITH DISTRIBUTED INTELLIGENCE, both filed on instant date herewith and commonly owned by the Assignee of this patent application, the entire contents of both of which are hereby expressly incorporated by reference.

20 FIELD OF THE INVENTION

The present invention relates generally to telescopes, such as those commonly used for observing/photographing celestial objects. The present invention relates more particularly to a
25 telescope system having an intelligent motor controller for accurately controlling telescope position and for precisely controlling the speed at which the telescope moves to facilitate tracking of celestial objects therewith. The present invention further comprises an optical encoder using two photodetectors
30 operating in quadrature to provide enhanced servo control for the telescope positioning motors, a calibration circuit for assuring reliable operation of the encoder with LED's having varying brightness characteristics and/or varying sensitivities of photodetectors and a rotatable mount which provides electrical
35 communication to an altitude drive motor located in a fork

1 36132/NEC/M618

thereof while mitigating problems due to undesirable wrapping of a power/control cable about the mount as the mount rotates.

5

BACKGROUND OF THE INVENTION

Telescopes for observing and/or photographing celestial objects such as planets, moons, stars, galaxies, asteroids, comets, nebulae, and the like are well known. Such telescopes range in size from small, readily portable ones to large fixed ones which are permanently located in observatories. The smaller telescopes are commonly used by students, hobbyists, and amateur astronomers. The larger telescopes are generally only used by researchers and professional astronomers.

Common types of telescopes include refractor telescopes, reflector telescopes, Schmidt-Cassegrain telescopes and Maksutov-Cassegrain telescopes. Refractor telescopes have a light collecting objective lens which focuses the collected light upon an eyepiece. The eyepiece, in cooperation with the objective lens, provides the desired magnification.

A reflector telescope utilizes a primary mirror to collect light and a secondary mirror to reflect the collected light through an opening in the telescope tube to an eyepiece. The eyepiece is mounted upon the tube, typically near the front of the tube, and is positioned orthogonal to the tube. The eyepiece cooperates with the primary mirror to provide the desired magnification.

Schmidt-Cassegrain telescopes are similar to reflector telescopes, except that the secondary mirror of a Schmidt-Cassegrain telescope reflects the collected light through an opening in the primary mirror instead of through an opening in the tube. In this manner, the eyepiece can be located directly behind the primary mirror, which is convenient for some types of viewing and photography. Additionally, light enters a Schmidt-Cassegrain telescope through a thin, two-sided aspheric lens,

1 36132/NEC/M618

known as a correction plate. Further, the secondary mirror is convex, so as to increase the effective focal length of the primary mirror.

Maksutov-Cassegrain telescopes are similar to Schmidt-Cassegrain telescopes, except that in Maksutov-Cassegrain telescopes light enters the telescope through a meniscus lens and an oversized primary mirror is used to provide an unvignetted field of view.

In viewing celestial objects with any type of telescope, it is necessary to continually move the telescope, so as to maintain the telescope in desired alignment with the celestial object. This is necessary to compensate for the rotation of the earth with respect to the cosmos. Thus, such continual realignment of the telescope maintains the desired celestial object within the field of view of the telescope as the earth rotates about its axis.

Smaller, portable telescopes of the reflector, refractor, Schmidt-Cassegrain, Maksutov-Cassegrain or any other desired type are typically mounted upon a tripod to facilitate portability and use of the telescope upon uneven outdoor surfaces, such as upon the ground, upon paved surfaces, such as roads or parking lots, or upon any other desired surface.

Two different types of mount, altitude azimuth and equatorial, are commonly used to removably attach a telescope to a tripod. Altitude azimuth (alt-azimuth) mounts provide a comparatively rigid and steady mount for the telescope, but are more difficult to maintain in alignment with the desired celestial object when the telescope is being aimed manually. Altitude azimuth mounts have only two perpendicular axes of rotation, which make the altitude azimuth telescopes inherently more rigid and stable than equatorial telescopes. The altitude axis of rotation allows the telescope to pivot with respect to the mount about an horizontal axis and the azimuth axis of

rotation allows the telescope to pivot about a vertical axis. In order to maintain alignment of a telescope having an altitude azimuth mount with respect to a desired celestial object, it is generally necessary to move the telescope about both the altitude and azimuth axes, since the position of celestial objects generally varies in both altitude and azimuth as the earth rotates.

Equatorial mounts facilitate easier maintenance of alignment of the telescope with a desired celestial object, since the telescope must only be moved about a single axis so as to maintain such alignment. In an equatorial mount, two orthogonal axes are configured such that one of the two axes can easily be aligned so as to be parallel to the axis of rotation of the earth. Once such alignment with the earth's axis of rotation is accomplished, then it is merely necessary to move the telescope about the other axis, so as to maintain alignment of the telescope with a desired celestial object. Thus, with an equatorial mount only a single axis of the telescope needs to be moved in order to maintain such alignment.

However, in an equatorial mount it is necessary to provide two additional orthogonal axes of alignment (similar to those of an altitude azimuth mount) in order to facilitate alignment of one axis so as to be parallel to the earth's axis of rotation. Thus, an equatorial mount actually comprises an altitude azimuth mount plus two additional axes and thus has a total of four different alignment axes. Because the equatorial mount comprises four different alignment axes, and because each axis inherently decreases the stability of the mount, it is difficult to manufacture an equatorial mount which is as stable as a comparable altitude azimuth mount (which has only two axes of alignment).

However, although such contemporary telescopes have proven generally useful for their intended purposes, they do possess

1 36132/NEC/M618

deficiencies which detract from their overall effectiveness.
For example, motorized telescopes frequently lack the precision
5 required to reliably locate (under computer control) more faint
celestial objects when higher magnifications are utilized. Thus,
it is frequently necessary to make tedious manual adjustments in
order to locate a desired celestial object and to position the
desired celestial object within the center of the field of view
10 of the telescope.

It is desirable to provide a motorized telescope system
having sufficient accuracy to generally locate celestial objects
of interest without requiring excessive manual adjustment of the
telescope.

15 Further, many motorized telescopes are incapable of
accurately tracking a celestial object (again, under computer
control) as it moves across the sky due to the earth's rotation.
While motorized telescopes frequently do provide some tracking
capability, it is often not sufficiently accurate to facility
20 celestial photography. Frequently, such tracking is accomplished
by merely stepping the telescope drive motors when the position
of the telescope has been determined to be substantially out of
alignment with the desired celestial object. This result in
jerky, sporadic movement of the telescope, which is too erratic
25 for high quality photography.

Although the prior art has attempted to overcome this
problem by utilizing telescope drive motors which run
continuously during tracking, such telescope systems still tend
to provide generally unsatisfactory results. The speed of such
30 motors must frequently be varied so as to maintain desired
tracking. However, such variances in the speed of the motors
inherently results in alignment errors since the celestial object
being tracked is moving at a constant speed. Further, even
maintaining a steady speed will not facilitate celestial
35 photography, unless the speed maintained is sufficiently close

1 36132/NEC/M618

to the desired tracking speed so as to maintain the position of the celestial object being photographed within approximately the same position within the field of view. Of course, the ability to maintain the desired positioning of the celestial object being photographed within the field of view of the telescope is most important when high magnification and/or long exposure times are necessary.

10 It is desirable to provide a motorized telescope system in which the telescope drive motors operate at a substantially steady and accurate speed during tracking, such that a celestial object being photographed maintains a desired position within the field of view of the telescope for an extended length of time.

15 Further, manual adjustment of a motorized telescope may be necessary when the drive motors thereof overshoot the position of the desired celestial object during the initial location process. Unless the drive motors slow down as the position of the telescope nears alignment with the desired celestial object, 20 inertia may cause the telescope to travel slightly past the intended alignment position. This is more likely to happen at higher magnifications. Thus, as the optical capabilities of telescopes continue to improve, the ability of motor drive systems to accurately and reliably position a telescope becomes 25 more critical.

It is desirable to provide a telescope drive system which mitigates overshoot when moving the telescope into alignment with a desired celestial object.

Further, a problem encountered in the manufacture the 30 optical encoders which provide position feedback for motorized telescopes involves the selection of LED's for the encoder assembly. Such LED's must have a brightness which is within a desired range in order to function properly in the encoder assembly. If the brightness of an LED is insufficient, then the 35 pulse is generated by the encoder will have insufficient width

1 36132/NEC/M618

such that when the pulses from two photodetectors should overlap, they will not overlap and when the brightness of the LED is excessive, the pulses will have too great of a width, such that the pulses from two photodetectors will overlap when they should not overlap. Thus, incorrect brightness of an LED will inhibit proper quadrature operation of an encoder assembly.

It is desirable that the photodetector provide an output having a substantially square waveform, i.e., wherein the corners of the pulses are not appreciably rounded and the slopes of the raising and falling edges of the pulses are generally vertical. This is necessary so as to allow the output of the photodetector to be provided directly to a microcontroller. If the waveform of the pulse is substantially degraded, i.e., has substantially rounded edges and/or excessively sloped rising and falling edges, then the output of the photodetector must be conditioned, so as to provide a signal which is suitable for input to a microcontroller. Typically, the microcontroller will be used to count the pulses input thereto within a given length of time, so as to determine the rate at which the pulses are being generated. Pulses which are not sufficiently well defined will not be counted, and a false determination of the position and/or speed of the telescope drive motor will result. Such a false determination of the position and/or speed of the motor will adversely affect the ability of the drive motor system to position the telescope accurately.

When the output of an LED is too weak, then the output pulse of a photodetector formed therefrom will tend to be rounded. The peak amplitude of the pulse may not be reached until some time after the encoder has gated the light to the photodetector. This will cause the pulse to be too narrow and possibly have reduced amplitude. The rising edge of the pulse will be poorly defined and the pulse will possibly be unrecognizable by the microcontroller.

1 36132/NEC/M618

When the output of an LED is too strong, then the output pulse will tend to be too broad and may even begin to overlap adjacent pulses, making them indistinguishable from one another, particularly at higher motor speeds. This occurs because light from the LED is reflected by surrounding structures and begins to reach the photodetector before the encoder is aligned so as to gate the light through and continues to reach the photodetector even after the encoder has ceased to gate the light through. In this instance, the microcontroller will not recognize individual pulses and will again provide an inaccurate count.

In an attempt to mitigate this problem, contemporary practice requires that LED's be tested prior to assembly into an encoder assembly, such that only those LED's having a brightness within the desired range are utilized. However, such testing is a time consuming and expensive process.

Further, photodetector sensitivities can vary substantially. Indeed, matched LED/photodetector pairs are commonly sold so as to account for variations in brightness of the LED, as well as variations in sensitivity of the photodetector.

It is desirable to provide for the use of LED's having a broad range of intensities and for photodetectors having a broad range of sensitivities in encoder assemblies, without adversely affecting the accuracy or reliability of the encoder assembly.

A problem occasionally encountered in the use of motorized telescopes is the undesirable twisting or winding of control and/or power cables around the telescope as the telescope moves in azimuth, as when a celestial object is being tracked for observation or photography for an extended period of time. The altitude motor of a motorized telescope is mounted upon a rotating portion of the telescope mount, typically the fork. Thus, as the telescope rotates in azimuth, the electrical cable

35

1 36132/NEC/M618

which provides electrical power and/or control signals to the altitude motor tends to wrap around the mount.

5 If the electrical cables become wrapped tightly around the mount, they may cause damage. The cables and/or their connectors may be broken as the mount continues to move and pull the electrical cables even tighter. Such wrapping of the electrical cables may even topple the telescope as they are pulled tight.
10 Toppling of the telescope is very likely to result in substantial and costly damage thereto. It is even possible that the telescope or nearby people may be hurt.

In an attempt to mitigate the problems associated with such wrapping of the electrical cables around the mount, slip rings
15 have been used to transfer power and/or control signals from the stationary portion of the telescope mount to the rotating portion thereof. However, such slip rings are prone to problems caused by wear and contamination. Both wear and contamination result in poor electrical contact of the slip rings, making them
20 difficult to maintain and unreliable.

It is desirable to provide a mechanism for mitigating the problems associated with electrical cables wrapping around the mount of a telescope as the telescope rotates in azimuth.

25 SUMMARY OF THE INVENTION

The present invention addresses and alleviates the above mention deficiencies associated with the prior art. More particularly, the present invention comprises a telescope system of the type commonly used to observe/photograph celestial
30 objects. Although the present invention is discussed herein as being used for observing/photographing celestial objects, those skilled in the art will appreciate that such telescopes are also commonly used to observe/photograph terrestrial objects. For example, telescopes are frequently used in nature photography to
35 facilitate photography at a distance, so that wild animals are

1 36132/NEC/M618

not disturbed. Thus, discussion herein of celestial
observation/photography is by way of example only and not by way
5 of limitation.

More particularly, the present invention comprises a
telescope system comprising a telescope, a tripod supporting the
telescope, a mount attaching the telescope to the tripod so as
to facilitate rotation of the telescope about two generally
10 orthogonal axes, and at least one controller/motor drive assembly
for effecting desired rotation of the telescope about at least
one of the two generally orthogonal axes. Preferably, the
present invention comprises two controller/motor drive
assemblies, wherein one of the two controller/motor drive
15 assemblies effects desired rotation about each one of the two
generally orthogonal axes.

Each controller/motor drive assembly comprises an electric
motor coupled to move the telescope about one of the two
generally orthogonal axes, a control circuit coupled to drive the
20 motor, and an encoder coupled to provide feedback from the motor
to the control circuit to facilitate enhanced position control
of the telescope. The control circuit is configured to cooperate
with the encoder to cause the motor to position the telescope as
desired.

25 The motor preferably comprises a DC motor. As those skilled
in the art will appreciate, DC motors are inexpensive and the
speed and direction of DC motors can be controlled simply by
varying the voltage and/or pulse width (as in pulse width
modulation control) applied thereto.

30 The control circuit preferably comprises a microcontroller,
preferably a PIC 16C54 or similar microcontroller. Those skilled
in the art will appreciate that a general purpose microprocessor
may alternatively be utilized. Further, dedicated circuitry,
preferably very large scale integrated (VLSI) circuitry, may be
35 utilized.

1 36132/NEC/M618

5 The encoder preferably comprises an optical encoder of the type having a spoked or toothed wheel which alternately blocks and transmits light. Alternatively, various other types of encoders, e.g., magnetic, electric, etc., may similarly be utilized.

10 According to the preferred embodiment of the present invention, the encoder wheel is attached directly to the motor shaft. However, as those skilled in the art will appreciate, the encoder wheel may alternatively be located elsewhere along a gear train which communicates rotary motion from the motor to the telescope. However, it will be appreciated that resolution is enhanced by positioning the encoder proximate the motor, which rotates faster than other portions of the gear train.

15 According to the preferred embodiment of the present invention, an LED directs light toward the encoder wheel and two photodetector receive light from the encoder so as to facilitate operation of the encoder in quadrature, as discussed in detail below.

20 The control circuit is preferably configured to control a speed at which the telescope moves, so as to facilitate accurate tracking of a celestial object being view/photographed. Further, the control circuit is preferably configured to reduce the speed at which the motor is moving the telescope as the telescope nears a desired position thereof, so as to mitigate overshoot of the telescope.

25 Optionally, the control circuit is configured to receive a signal representative of an angle by which the telescope is to be moved and is configured to cause the telescope to move by that angle. Optionally, the control circuit is further configured to store a present position of the telescope, receive a desired new position of the telescope, calculate a difference between the present position of the telescope and the desired new position

35

of the telescope, and cause the telescope to move by approximately the calculated difference.

5 According to the preferred embodiment of the present invention, a plurality of sensors, preferably two photodetectors, receive light from the light source, e.g., LED, after the light passes through the encoder wheel. The encoder wheel alternately permits light to travel from the light source to the light
10 sensors and prevents light from traveling from the light source to the light sensors. Since movement of the encoder wheel is proportional to the speed of the motor, the output of the light sensors is representative of the speed of the motor. The light sensors are coupled to provide a signal to the control circuit
15 which is representative of the speed of the electric motor to facilitate servo control of the electric motor.

The two light sensors are preferably configured to operate in quadrature, so as to provide enhanced resolution of the rotational position of the encoder wheel. The two light sensors
20 are positioned apart from one another approximately the distance of one half of a radially extending tooth or sprocket of the encoder wheel, such that they are capable of sensing an intermediate position of the encoder wheel which cannot be sensed when only one light sensor is utilized. More particularly, the
25 use of two light sensors configured to operate in quadrature facilitates the sensing of the following four positions of the encoder wheel: both sensors blocked, the first sensor not blocked and the second sensor blocked, the first sensor blocked and the second sensor not blocked, and both sensors not blocked. Since
30 the use of only a single light sensor facilitates the sensing of only two positions of the encoder wheel, i.e., blocked and not blocked, quadrature operation doubles the resolution of the encoder wheel, thus providing enhanced position control of the telescope. More importantly, the use of quadrature facilitates
35 determination of the direction of rotation of the motor.

According to the preferred embodiment of the present invention, a calibration circuit is coupled to the control
 5 circuit and to the light source, to set a brightness of the light source to a desired level. The light sensor(s) are coupled to provide a signal to the control circuit which is representative of a brightness of the light source and the control circuit is configured to determine a brightness of the light source from the
 10 signal. The control circuit is configured to vary the brightness of the light source, so as to maintain the brightness of the light source within a desired range.

Varying the brightness of the light source to maintain the brightness within a desired range allows construction of an
 15 encoder assembly comprising untested LED's and photodetectors. Thus, the brightness of the LED's and the sensitivity of the photodetectors does not have to be verified prior to construction of the encoder assembly. Eliminating the need for such testing or pre-selection of the LED's and photodetectors substantially
 20 reduces the cost of manufacturing the encoder assembly.

Further, the ability to vary the brightness of the LED's mitigates problems due to variations in brightness throughout the life of the LED, due to aging and/or soiling thereof. As those skilled in the art will appreciate, LED's tend to vary in
 25 brightness during the life thereof. Also, contamination or soiling of the LED may cause its brightness to diminish substantially, thus requiring undesirable and time consuming maintenance of the encoder assembly.

The calibration circuit preferably comprises a plurality of
 30 resistors which are configured to be selectively placed into series with the LED, so as to limit current through the LED in a manner which provides the desired brightness thereof. The control circuit senses the brightness of the LED and selects the resistor(s) necessary to provide the desired brightness.

Preferably, the resistors are switchable so as to be placed in parallel with one another and in series with the LED.

5 According to the preferred embodiment of the present invention, a motorized mount attaches the telescope to the tripod and facilitates positioning of the telescope as desired. The motorized mount comprises a base fixedly attached to a tripod. A fork is pivotally attached to the base via a fork pivot to
10 facilitate movement of the telescope in azimuth. The telescope is pivotally attached to the fork to facilitate movement of the telescope in altitude. An azimuth motor is attached to the base and coupled to rotate the fork. An altitude motor is attached to the fork and coupled to rotate the telescope. An electrical
15 cable extends from the base to the altitude motor, preferably through the fork, for providing electrical communication to the altitude motor, preferably from either a controller/motor interface or from a hand-held motor control.

In order to mitigate problems associated with the electrical
20 cable wrapping around the mount and/or the tripod, stops are provided to limit rotation of the telescope about the azimuth axis. More particularly, a base stop is formed upon the base, a fork stop is formed upon the fork, and an intermediate stop is configured to rotate independently with respect to the base and
25 the fork. The fork stop abuts the intermediate stop and the intermediate stop abuts the base stop when the fork is rotated less than two revolutions with respect to the base. Limiting rotation of the fork to less than two revolutions with respect to the base limits wrapping of the cable around the fork pivot,
30 the mount, and/or the tripod.

The fork stop preferably comprises a post formed upon the fork and extending downwardly therefrom. Similarly, the base stop preferably comprises a post formed to the base and extending upwardly therefrom. The fork stop and the base stop are

1 36132/NEC/M618

configured such that the do not interfere with one another as the fork rotates relative to the base.

5 Preferably, the intermediated stop is configured to rotate about the fork pivot. The intermediate stop is preferably defined by a lever which extends from the fork pivot and is rotatably attached thereto.

10 Thus, the present invention comprises a telescope system having an intelligent motor controller for accurately controlling telescope position and for precisely controlling the speed at which the telescope moves to facilitate tracking of celestial objects therewith. The present invention further comprises an optical encoder using two LED's to provide enhanced servo control
15 the telescope positioning motors thereof, a calibration circuit for assuring reliable operation of the encoder with LED's having varying brightness characteristic and a brushless mount for providing electrical communication to an altitude drive motor located in a fork thereof.

20

BRIEF DESCRIPTION OF THE DRAWINGS

These and other features, aspects and advantages of the present invention will be more fully understood when considered with respect to the following detailed description, appended
25 claims and accompanying drawings, wherein:

Figure 1 is a perspective view of a telescope system, wherein a telescope is supported by a tripod;

Figure 2 is a plan view of the azimuth motor/reduction gear/worm gear assembly of the telescope of Figure 1;

30 Figure 3 is a perspective view of the base of the motorized mount of Figure 1, with the base turned upside down to show the azimuth motor/reduction gear/worm gear assembly and the motor controller printed circuit board thereof;

35

Figure 4 is a perspective view of the base of the motorized mount of Figure 1, showing the bottom of the fork assembly (base plate), base stop, fork stop and intermediate stop;

Figure 5 is a perspective view of one arm of a fork assembly, showing the altitude motor/reduction gear/ worm gear assembly thereof;

Figure 6 is an exploded perspective view of the altitude motor/reduction gear assembly of Figure 5;

Figure 7 is a plan view of the altitude motor/reduction gear assembly of Figure 5;

Figure 8 is a perspective view of a vibration isolated worm assembly according to the present invention;

Figure 9 is a cross-sectional view of the vibration isolated worm assembly of Figure 8;

Figure 10 is an electrical schematic of the motor controller of the present invention;

Figure 11 is an electrical schematic of a controller/motor interface of the present invention; and

Figure 12 is a perspective view of the connector of the controller/motor interface of Figure 11.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The detailed description set forth below in connection with the appended drawings is intended as a description of the presently preferred embodiment of the invention, and is not intended to represent the only form in which the present invention may be constructed or utilized. The description sets forth the construction and functions of the invention, as well as the sequence of steps for operating the invention in connection with the illustrated embodiment. It is to be understood, however, that the same or equivalent functions may be accomplished by different embodiments that are also intended to be encompassed within the spirit and scope of the invention.

The telescope system having an intelligent motor controller of the present invention is illustrated in Figures 1 through 12, which depict a presently preferred embodiment thereof.

Referring now to Figure 1, the telescope system 10 of the present invention comprises a telescope 12 supported by a tripod 14 and attached to a mount defined by a base 78, base plate 84, and arms 87 and 89. Arms 87 and 89 are fixedly attached to the base plate 84 and extend therefrom. Base plate 84, and arms 87 and 89 define a fork 19 which is rotatably attached to the base 78. The base 78 and fork 19 facilitate rotation of the telescope 12 about two orthogonal axis, i.e., an altitude axis defined by a first pivot which allows the telescope 12 to rotate with respect to the fork 19 and an azimuth axis defined by a second pivot which allows the fork 19 to rotate with respect to the base 78.

Preferably, the present invention is configured such that the tripod can be removed and the telescope can be set upon a flat surface such as a table top such that it is supported by the mount. When the telescope is used upon a flat and level surface, then the vertical axis of the mount defines an azimuth axis and the horizontal axis of the mount defines an altitude axis.

It will be appreciated that the terms "altitude" and "azimuth" are defined broadly herein, since the legs of the tripod 14 can be adjusted to orient these axes such that they do not actually effect movement strictly in either altitude or azimuth. Indeed, it is possible to adjust the legs of the tripod such that the mount functions like an equatorial mount. However, as used herein, those terms are not inconsistent with the definitions typically given to them by those skilled in the art and are clearly consistent with the structural features of the invention. Moreover, when the legs of the tripod 14 are removed so that the base 16 is level, then the terms "altitude" and "azimuth" assume their more common definition.

Referring now to Figure 2, an azimuth motor/reduction gear/worm gear assembly 50 for the telescope of Figure 1 is shown. Motor 52 preferably runs at approximately 0 to approximately 15,000 RPM to provide sufficient torque for rotating the telescope 12 about the azimuth axis. Motor 52 preferably comprises a DC motor, whose speed is varied by merely varying the voltage and/or pulse width of a series of pulses applied thereto. Reduction gear assembly 54 reduces the speed of rotation and increases the torque by providing a gear ratio of approximately 205.3 to 1. The motor 52 and the reduction gear assembly 54 are mounted to platform 56. The motor 52 is preferably mounted to the platform 56 via shock/vibration isolation mounts to mitigate the transmission of undesirable vibration from the motor 52 to the telescope 12, where such vibration causes undesirable movement of the field of view of the telescope 12. The platform 56 is similarly shock/vibration isolated, as described in detail below.

Primary gear 58 is attached to the shaft 60 of motor 52. An encoder wheel 62 is also attached to the shaft 62 of motor 52, and is preferably formed to primary gear 58. Primary gear 58 drives intermediate gears 64 and intermediate gears 64 drive output gear 66 to provide the desired gear ratio. Output gear 66 has output coupling 68 formed thereto for facilitating attachment thereof to worm gear assembly 70. Preferably, a shaft 72 of worm gear assembly 70 is received within and engages output coupler 68, such that rotary motion of output gear 66 is transmitted to the shaft 72. The shaft 72 of the worm gear assembly 70, upon which worm 74 is formed, is shock/vibration isolated from the worm mount 76, as described in detail below.

Referring now to Figure 3, the azimuth motor/reduction gear/worm gear assembly 50 is attached to telescope mount base 78, preferable via threaded fasteners such as bolts or screws. The platform 56 of the motor/reduction gear/worm gear assembly

50 is attached to the base 78 via shock/vibration isolators such as rubber o-rings or the like which are preferably position
 5 around the threaded fasteners which attach the platform 56 to the base in a manner similar to that shown in Figure 5 for attaching platform 114 to arm 87. The base 78 is fixedly attached to the tripod head. The base 78 shown in Figure 3 is upside down, so as to clearly show the motor/reduction gear assembly/worm gear
 10 assembly 50 located therein. The worm 74 drives worm gear 80 which is attached via a clutch to azimuth pivot shaft 82. The worm 74 to worm gear 80 connection preferably provides a gear ratio of approximately 60 to 1. The shaft 82 is rotatably attached to base 78 and is fixedly attached to rotating base
 15 plate 84 (Figure 4), to which the telescope mount fork is attached so as to facilitate rotation of the telescope 12 in azimuth. A motor control circuit is formed upon printed circuit board 51, as discussed below.

Referring now to Figure 4, the base 78 of Figure 3 is shown
 20 right side up (inverted with respect to Figure 3). The rotating base plate 84, upon which the fork 19 and telescope 12 are mounted, is attached to the base 78 via azimuth pivot shaft 82 in a manner which limit rotation of the rotating base plate 84 to less than two revolutions with respect to the base 78. This
 25 likewise limits rotation of the telescope 12 to less than two revolutions with respect to the tripod 14. Such rotation limitation mitigates undesirable wrapping of an electrical cable (not shown) which supplies power and/or control signals to the altitude drive motor 85 (Figure 5), which is located within one
 30 arm 87 of the fork to which the telescope 12 is pivotally attached. The electrical cable may either be located within the base 78 (in which case the electrical cable passes through an aperture in the rotating base plate 84 to pass from the base 78 to the arm 87), or may be located outside of the base 78. If the
 35 cable is located within the base 78, then the cable tends to wrap

1 36132/NEC/M618

around the azimuth pivot shaft 82 as the base plate 84 rotates. If the cable is located outside of the base 78, fork or tripod
5 then the cable tends to wrap around the base 78 as the base plate 84 rotates. In either instance, such wrapping is undesirable, as discussed above.

More particularly, the base plate 84 comprises a stop, preferable defined by downwardly extending post 86 and the base
10 78 likewise comprises a stop, preferably defined by upwardly extending post 96. The downwardly extending post 86 and the upwardly extending post 96 are configured such that they do not interfere with one another as the base plate 84 rotates with respect to the base 78.

15 An intermediate stop 88 is configured to rotate, preferably about azimuth pivot shaft 82. The intermediate stop 88 is configured such that when the base plate 84 rotates less than two times with respect to the base 78, then the downwardly extending post 86 abuts the intermediate stop 88 and the intermediate stop
20 88 abuts the upwardly extending stop 96, so as to halt further rotation of the base plate 84 with respect to the base 78 in a manner which mitigates undesirable wrapping of the electrical cable.

According to the preferred embodiment of the present
25 invention, the intermediate stop 88 is defined by a ring which encircles and rotates about the azimuth pivot axis 82. The intermediate stop 88 is preferably pivotally attached to boss 112 formed upon base 78. The intermediate stop 88 preferably comprises first 90, second 92 and third 94 protrusions. The
30 first protrusion 90 contacts the upwardly extending post 96 of the base 78 when the base plate 84 is rotated clockwise and the first protrusion 90 contacts the downwardly extending post 86 of the base plate 84 when the base plate 84 is rotated counter-clockwise. In a like fashion, the third protrusion 94 contacts
35 the downwardly extending protrusion 86 when the base plate 84 is

rotated clockwise and the third protrusion 94 contacts the
upwardly extending post 96 when the base plate 84 is rotated
5 counter-clockwise.

Preferably, the first 90 and third 94 protrusions are
sufficiently flexible as to bend slightly when the downwardly
extending post 86 abuts the intermediate stop 88 and the
intermediate stop 88 abuts the upwardly extending post 96, so as
10 to cushion the resulting cessation of rotation of the base plate
84. The second protrusion of the intermediate stop 88 limits
such bending of the first 90 and second 94 protrusions. Cutout
98 formed at the bases of the first 90 and third 94 protrusions
enhance the flexibility thereof, so as to facilitate such
15 bending.

A controller/motor interface 100 facilitates electrical
interconnection of a hand held motor controller to the azimuth
52 and altitude 85 motors via jack 104. Auxiliary jacks 102 and
110 facilitates the electrical interconnection of additional
20 devices, such as a data logger, personal computer, global
positioning system (GPS), electronic leveler, CCD camera, RS-232
port, Internet connection, etc. Power jack 106 facilitates the
connection of a power source for the azimuth 52 and altitude 85
drive motors. Power indicator light 107 illuminates when power
25 is provided via power jack 106, and when switched on.

Referring now to Figure 5, an arm 87 of a fork to which the
telescope 12 is pivotally attached to facilitate altitude
adjustment thereof is shown. An altitude motor/reduction
gear/worm gear assembly 112, analogous to the azimuth
30 motor/reduction gear/worm gear assembly 50 of Figures 2 and 3,
is mounted within the arm 87. Shock/vibration mounting for the
motor 85 and the platform 114 is similarly provided as discussed
in detail below. Threaded fasteners 120 attach the platform 114
to the arm 87. Rubber o-rings 124 are located upon each threaded
35 fastener 120 on either side of the platform 114, such that the

1 36132/NEC/M618

platform 114 is sandwiched between the o-rings 124. Preferably,
plastic bushings or sleeve washers 122 prevent excessive
5 compression of the o-rings, by limiting the degree to which
threaded fasteners 120 can be tightened.

Although the physical configuration or layout of the
altitude motor/reduction gear/worm gear assembly 112 is somewhat
different from that of the azimuth motor/reduction gear/ worm
10 gear assembly 50, this difference is merely to accommodate the
packaging requirements of the arm 87, as opposed to those of the
base 78. The components of the altitude motor/reduction
gear/worm gear assembly 112 (particularly the motor 85, reduction
gear assembly 113, and worm gear assembly 111 thereof) are
15 otherwise similar in structure and function to those of the
azimuth motor/reduction gear/worm gear assembly 50.

Worm gear 115 is driven by worm 109 and attaches via a
clutch to altitude pivot shaft (not shown), which in turn rigidly
attaches to telescope mount bracket 116, preferably via key 117
20 thereof. The telescope mount bracket 116 rigidly attaches to the
telescope, preferably via threaded fasteners which are located
within apertures 118, such that rotation of the worm gear 115
causes like rotation of the telescope 12.

Referring now to Figures 6 and 7, further details of the
25 altitude motor 85 and the altitude reduction gear assembly 113
are shown. The motor 85 is mounted to the platform 114, defined
by lower platform section 114a and upper platform section 114b,
via shock/vibration isolators defined by rubber o-ring 130 and
by resilient motor mount 132. O-ring 130 is located around boss
30 134 of motor 85 and is captured by cutouts 136 and 138, of the
lower 114a and upper 114b platform sections, respectively. The
resilient mount 132 attaches to the rear of motor 85 and mounts
the rear of the motor 85 to the platform 114.

Motor drives, particularly in larger telescope systems, tend
35 to generate a substantial amount of audible noise. Indeed, the

1 36132/NEC/M618

amount of audible noise generated by larger telescopes systems
can be annoying. The o-ring 130 and the resilient mount 132
5 substantially reduce the amount of audible noise produced.

Primary gear 140 is attached to shaft 142 of motor 85.
Encoder wheel 144 is preferably formed as an integral unit with
primary gear 140. Intermediate gears 150,152,154 and 156 are
driven by primary gear 140 and are configured to provide the
10 desired gear ratio. Output gear 160 facilitates attachment of
the reduction gear assembly 113 to the worm gear assembly 111
(Figure 5) via gear 161. Intermediate gears 152 and 154 are
positioned upon shaft 155 and intermediate gears 150 and 156, as
well as output gear 160, are positioned upon shaft 157.

15 A motor control circuit is formed upon printed circuit board
162 for providing precise control of the motor 85, as discussed
in detail below.

Referring now to Figures 8 and 9, worm 74, 109 is preferably
shock/vibration isolated so as to mitigate the undesirable
20 transmission of vibration from the motor to the telescope. The
worm 74 of the azimuth motor/reduction gear/worm gear assembly
50 and the worm 109 of the altitude motor/reduction gear/worm
gear assembly 113 are substantially identical and are discussed
jointly below.

25 Shock/vibration isolation is provided by attaching the worm
74, 119 to the bracket 170 via a resilient material, such as that
of two resilient o-rings 172. The resilient o-rings 172 are
captured intermediate bracket 170 and bushings 174 (as best shown
in Figure 9) within which the shaft 72 of the worm rotates.
30 Belville washers 176 are compressed against adjacent flat washers
178 by nut 180 on one end of the shaft 72 and by output gear 68,
161 which is attached to the opposite end of the shaft 72 via
threaded fastener 176. Threaded fasteners 178 attach the worm
bracket 170 to the base 78 and the arm 87.

35

The resilient o-rings provide a substantial amount of desirable vibration damping of the telescope. As those skilled
 5 in the art will appreciate, inadvertently tapping or bumping the telescope may result in the generation of vibrations or oscillations of the telescope which sometimes tend to last in excess of 30 seconds. Such oscillations or vibrations of the telescope are extremely undesirable in that they cause the field
 10 of view to move substantially and therefore inhibit viewing and/or photography. It has been found that the use of such resilient o-rings 172 to mount the worm 74 substantially reduces such undesirable oscillation or vibration of the telescope.

Referring now to Figure 10, an electrical schematic of the
 15 circuitry for driving the motor 52, 85 is shown. Since the circuits for driving the azimuth 52 and altitude 85 motors are substantially identical, they will be describe jointly below.

A control circuit 200 receives a servo feedback signal from encoder circuit 204 and provides a motor drive signal, the
 20 amplitude and/or pulse width of which determines the speed of the motor 52, 85, to drive circuit 206 which provides the power necessary to drive the motor 52, 85. Calibration circuit 208 assures proper operation of the encoder, as discussed below.

The control circuit 200 preferably comprises a PIC16C54
 25 microcontroller 202 couple to receive inputs RB0 and RB1 thereof signal from photodetector 212 and photodetector 214, respectively, of the encoder circuit 204, which are indicative of the speed and relative rotational position of the motor 52, 85. The encoder circuit comprises an LED 210 which emits light
 30 toward the encoder wheel 60, 144. Light which passes between the spokes or teeth of the encoder wheel 60, 144 is received by the two photodetectors 212 and 214, which operate in quadrature to provide enhanced resolution for servo feedback control, as discussed above.

The microcontroller 202 is coupled to transmit a motor drive control signal from outputs RA2 and RA3 thereof to the motor drive circuit 206. The DC motor may be driven in either direction, so as to position the telescope 12 as desired. Field effect transistors 216 and 218 cooperate to provide a drive signal of a first polarity to the motor 52, 85 to drive the motor 52, 85 in a first direction when a signal is provided on output RA2 of microcontroller 202 and field effect transistors 220 and 222 cooperated to provide a drive signal of a second polarity to motor 52, 85 to drive the motor 52, 85 in a second direction when a signal is provided on output RA3 of microcontroller 202. Bipolar transistors 224 and 226 cooperate with field effect transistors 218 and 222, respectively, to cause field effect transistors 218 and 222 to provide opposite polarity signals to the motor 52, 85 from those provided by field effect transistors 216 and 220, respectively. Thus, field effect transistors 216, 218, 220, and 222 cooperate to provide power to drive the motor 52, 85 at the desired speed and in the desired direction, as directed by microcontroller 202.

The speed of the drive motor 52, 58 is preferably controlled by pulse width modulation (PWM), wherein the speed of the motor is proportional to the width of each pulse in a series of pulses provided thereto, according to well known principles. Thus, when it is desired to move the telescope at a faster rate, then pulse width is increased and when it is desired to move the telescope at a slower rate, then pulse width is decreased. Optionally, the number of pulses and/or the voltage of the pulses can also be varied so as to provide desired control, according to well known principles.

The brightness of the LED 210 can be determined by the microcontroller 202 by determining the amplitude of the signals from the photodetectors on inputs RB0 and RB1 of the microcontroller 202. The microcontroller provides between one

1 36132/NEC/M618

and six outputs to the calibration circuit 208 so as to cause the LED 210 to have a desired brightness. More particularly, outputs
5 RB2 through RB7 selectively switch resistors 230 through 235 into series with LED 210 (and into parallel with one another), so as to vary the current through LED 210, and thus vary the brightness of LED 210. In this manner, the brightness of LED 210 is maintained within a desired range, as discussed above.

10 Voltage regulator 240, in cooperation with capacitors 242 and 244 and inductor 246 receives 12 VDC from connector JP2 and provides regulated VCC. Crystal oscillator 248, in cooperation with capacitors 250 and 252, facilitates the generation of a clock signal for microcontroller 202. Alternatively, a ceramic
15 resonator may be wed in place of crystal oscillator 248.

Referring now to Figures 11 and 12, electrical junction 260 facilitates the connection of a hand held controller, e.g., hand box, to the motors of a motorized telescope mount. Junction 260 is an alternative to interface 100, although both may be utilized
20 if desired. The junction 260 accommodates either the motors of an altitude azimuth telescope mount or the motors of an equatorial mount. 4-pin RJ-11 I/O port 270 facilitates the connection of auxiliary data and auxiliary clock signals from a hand held controller connected to 8-pin RJ-11 I/O port 262 to the
25 desired auxiliary devices. 4-pin RJ-11 I/O port 268 facilitates the connection of either the declination motor (equatorial mount) or the altitude motor (altitude azimuth mount) to the hand held controller via 8-pin RJ-11 I/O port 262. Similarly, 4-pin RJ-11 I/O port 266 facilitates the connection of either the right
30 ascension motor (equatorial mount) or the azimuth motor (altitude azimuth mount) to the hand held controller via 8-pin RJ-11 I/O port 262. LED 272 illuminates when 12 VDC is provided at connector 276. Resistor 274 limits current through LED 272. 12 VDC is provided to each of the 4-pin RJ-11 I/O ports 266, 268 and
35 270 and to the 8-pin RJ-11 I/O port 262 from power connector 276.

1 36132/NEC/M618

5 More particularly, auxiliary data and auxiliary clock
signals are provided on two separate conductors to 4-pin RJ-11
I/O port 270 by 8-pin RJ-11 I/O port 262. Declination/altitude
clock and declination/altitude data signals are provided on two
separate conductors to 4-pin I/O port 268 by 8-pin RJ-11 I/O port
262. Similarly, right ascension/azimuth clock and right
ascension/azimuth data signals are provided on two separate
10 conductors to 4-pin RJ-11 I/O port 266 by 8-pin RJ-11 I/O port
262. Thus, a 2-wire interface (clock and data) is provided for
facilitating control of the telescope drive motors by the hand
held controller.

15 It is understood that the exemplary telescope system
described herein and shown in the drawings represents only a
presently preferred embodiment of the invention. Indeed, various
modifications and additions may be made to such embodiment
without departing from the spirit and scope of the invention.
For example, description of the invention as being applicable to
20 altitude and azimuth mounting and motor control is by way of
example only, and not by way of limitation. Thus, those skilled
in the art will appreciate that the present invention is likewise
applicable to equatorial and/or any other desired type of
telescope mount. Thus, these and other modifications and
25 additions may be obvious to those skilled in the art and may be
implemented to adapt the present invention for use in a variety
of different applications.

30

35

1 36132/NEC/M618

CLAIMS

5 1. A telescope system of the type commonly used to observe/photograph celestial objects, the telescope system comprising:

a telescope;

a tripod supporting the telescope;

10 a mount attaching the telescope to the tripod so as to facilitate rotation of the telescope about two generally orthogonal axes;

at least one controller/motor assembly, each controller/motor assembly comprising:

15 an electric motor coupled to move the telescope about one of the two generally orthogonal axes;

a control circuit coupled to drive the motor;

20 an encoder coupled to provide feedback from the motor to the control circuit to facilitate enhanced position control of the telescope; and

wherein the control circuit is configured to cooperate with the encoder to cause the motor to position the telescope as desired, so as to facilitate enhanced location and tracking of celestial objects.

25

2. The telescope system according to claim 1, wherein the motor comprises a DC motor.

30 3. The telescope system according to claim 1, wherein the control circuit comprises a microcontroller.

4. The telescope system according to claim 1, wherein the control circuit comprises a PIC 16C54 microcontroller.

35

1 36132/NEC/M618

5. The telescope system according to claim 1, wherein the control circuit comprises a microprocessor.

5

6. The telescope system according to claim 1, wherein the encoder comprises an optical encoder.

10 7. The telescope system according to claim 1, wherein the encoder comprises an encoder wheel.

8. The telescope system according to claim 1, wherein the encoder comprises an encoder wheel positioned upon a shaft of the motor.

15

9. The telescope system according to claim 1, wherein the encoder comprises:

an encoder wheel positioned upon a shaft of the motor;

an LED directing light toward the encoder wheel; and

20 a pair of photodiodes receiving light from the encoder, such that the light is modulated so as to be representative a of speed of the motor.

10. The telescope system according to claim 1, wherein the control circuit is configured to control a speed at which the telescope moves to facilitate tracking of a celestial object being viewed/photographed.

11. The telescope system according to claim 1, wherein the control circuit is configured to reduce a speed at which a telescope is being moved as the telescope nears a desired position thereof, so as to mitigate overshoot of the telescope.

12. The telescope system according to claim 1, wherein the control circuit is configured to receive a signal representative

1 36132/NEC/M618

of an angle by which the telescope is to be moved and is
configured to cause the telescope to move by approximately that
5 angle.

13. The telescope system according to claim 1, wherein the
control circuit is configured to store a present position of the
telescope, receive a desired new position of the telescope,
10 calculate a difference between the present position of the
telescope and the desired new position of the telescope, and
cause the telescope to move by approximately the calculated
difference.

14. A controller/motor assembly for a telescope of the type
commonly used to observe/photograph celestial objects, the
controller/motor assembly comprising:

an electric motor coupled to move the telescope about
one of two generally orthogonal axes;

20 a control circuit coupled to drive the motor;

an encoder coupled provide feedback from the motor to
the control circuit to facilitate enhanced position control of
the telescope; and

wherein the control circuit is configured to cooperate
25 with the encoder to cause the motor to position the telescope as
desired, so as to facilitate enhanced location and tracking of
celestial objects.

15. The controller/motor assembly according to claim 14,
30 wherein the motor comprises a DC motor.

16. The controller/motor assembly according to claim 14,
wherein the control circuit comprises a microcontroller.

35

1 36132/NEC/M618

17. The controller/motor assembly according to claim 14,
wherein the control circuit comprises a PIC 16C54
5 microcontroller.

18. The controller/motor assembly according to claim 14,
wherein the control circuit comprises a microprocessor.

10 19. The controller/motor assembly according to claim 14,
wherein the encoder comprises an optical encoder.

20. The controller/motor assembly according to claim 14,
wherein the encoder comprises an encoder wheel.
15

21. The controller/motor assembly according to claim 14,
wherein the encoder comprises an encoder wheel positioned upon
a shaft of the motor.

20 22. The controller/motor assembly according to claim 14,
wherein the encoder comprises:

an encoder wheel positioned upon a shaft of the motor;
an LED directing light toward the encoder wheel; and
a pair of photo diodes receiving light from the encoder,
25 such that the light is modulated so as to be representative a of
speed of the motor.

23. The controller/motor assembly according to claim 14,
wherein the control circuit is configured to control a speed at
30 which the telescope moves to facilitate tracking of a celestial
object being viewed/photographed.

24. The controller/motor assembly according to claim 14,
wherein the control circuit is configured to reduce a speed at
35

1 36132/NEC/M618

which a telescope is being moved as the telescope nears a desired position thereof, so as to mitigate overshoot of the telescope.

5

25. The controller/motor assembly according to claim 14, wherein the control circuit is configured to receive a signal representative of an angle by which the telescope is to be moved and is configured to cause the telescope to move by approximately that angle.

10

26. The controller/motor assembly according to claim 14, wherein the control circuit is configured to store a present position of the telescope, receive a desired new position of the telescope, calculate a difference between the present position of the telescope and the desired new position of the telescope, and cause the telescope to move by approximately the calculated difference.

15

20

27. A telescope system of the type commonly used to observe/photograph celestial objects, the telescope system comprising:

a telescope;

a tripod supporting the telescope;

25

a mount attaching the telescope to the tripod;

at least one controller/motor assembly for moving the telescope with respect to the tripod, each controller/motor assembly comprising:

an electric motor;

30

a control circuit coupled to drive the electric motor;

a light source;

a plurality of light sensors receiving light from the light source;

an encoder wheel alternately permitting light to travel

35

from the light source to the light sensors and preventing light

1 36132/NEC/M618

from traveling from the light source to the light sensors,
movement of the encoder wheel being representative of movement
5 of the drive motor; and

wherein the light sensors are coupled to provide a
signal to the control circuit which is representative of movement
of the electric motor to facilitate servo control of the electric
motor.

10

28. The telescope system as recited in claim 27, wherein
the light source comprises a light emitting diode (LED).

29. The telescope system as recited in claim 27, wherein
15 the plurality of light sensors comprise two light sensors.

30. The telescope system as recited in claim 27, wherein
the plurality of light sensors comprise two light sensors
configured to operate in quadrature.

20

31. The telescope system as recited in claim 27, wherein
the plurality of light sensors comprise photodiodes.

32. The telescope system as recited in claim 27, wherein
25 the encoder wheel comprises a plurality of spokes extending
radially so as to alternately permit light to travel from the
light source to the light sensors and prevent light from
traveling from the light source to the light sensors.

30 33. The telescope system as recited in claim 27, wherein
the electric motor comprises a DC motor.

34. A controller/motor assembly for moving a telescope of
the type commonly used to observe/photograph celestial objects,
35 the controller/motor assembly comprising:

1 36132/NEC/M618

an electric motor;

a control circuit coupled to drive the electric motor;

5 a light source;

a plurality of light sensors receiving light from the light source;

an encoder wheel alternately permitting light to travel from the light source to the light sensors and preventing light from traveling from the light source to the light sensors, movement of the encoder wheel being representative of movement of the drive motor; and

wherein the light sensors are coupled to provide a signal to the control circuit which is representative of movement of the electric motor to facilitate servo control of the electric motor.

35. The controller/motor assembly as recited in claim 34, wherein the light source comprises a light emitting diode (LED).

36. The controller/motor assembly as recited in claim 34, wherein the plurality of light sensors comprise two light sensors.

37. The controller/motor assembly as recited in claim 34, wherein the plurality of light sensors comprise two light sensors configured to operate in quadrature.

38. The controller/motor assembly as recited in claim 34, wherein the plurality of light sensors comprise photo diodes.

39. The controller/motor assembly as recited in claim 34, wherein the encoder wheel comprises a plurality of spokes extending radially so as to alternately permit light to travel

35

1 36132/NEC/M618

from the light source to the light sensors and prevent light from traveling from the light source to the light sensors.

5

40. The controller/motor assembly as recited in claim 34, wherein the electric motor comprises a DC motor.

41. A telescope system of the type commonly used to
10 observe/photograph celestial objects, the telescope system comprising:

a telescope;

a tripod supporting the telescope;

a mount attaching the telescope to the tripod;

15 at least one controller/motor assembly for moving the telescope with respect to the tripod, each controller/motor assembly comprising:

an electric motor;

a control circuit coupled to drive the electric motor;

20 a light source;

at least one light sensor receiving light from the light source;

an encoder wheel alternately permitting light to travel from the light source to the light sensor(s) and preventing light
25 from traveling from the light source to the light sensor(s), movement of the encoder wheel being representative of movement of the drive motor;

a calibration circuit coupled to the control circuit and to the light source to set a brightness of the light source
30 to a desired level; and

wherein the light sensor(s) are coupled to provide a signal to the control circuit which is representative of a movement of the electric motor to facilitate servo control of the electric motor.

35

1 36132/NEC/M618

42. The telescope system as recited in claim 41, wherein
the calibration circuit comprises a plurality of current limiting
5 resistors selectively switchable into series with the light
source to vary a current through the light source.

43. The telescope system as recited in claim 42, wherein
the control circuit is configured to determine a brightness of
10 the light source.

44. A controller/motor assembly for a telescope of the type
commonly used to observe/photograph celestial objects, the
controller/motor assembly comprising:

15 an electric motor;
a control circuit coupled to drive the electric motor;
a light source;

at least one light sensor receiving light from the
light source;

20 an encoder wheel alternately permitting light to travel
from the light source to the light sensor(s) and preventing light
from traveling from the light source to the light sensor(s),
movement of the encoder wheel being representative of movement
of the drive motor;

25 a calibration circuit coupled to the control circuit
and to the light source to set a brightness of the light source
to a desired level; and

wherein the light sensor(s) are coupled to provide a
signal to the control circuit which is representative of movement
30 of the electric motor to facilitate servo control of the electric
motor.

45. The controller/motor assembly as recited in claim 44,
wherein the calibration circuit comprises a plurality of current

35

1 36132/NEC/M618

limiting resistors selectively switchable into series with the light source to vary a current through the light source.

5

46. The controller/motor assembly as recited in claim 45, wherein the control circuit is configured to determine a brightness of the light source.

10 47. A telescope system of the type commonly used to observe/photograph celestial objects, the telescope system comprising:

a telescope;

a tripod supporting the telescope;

15 a motorized mount attaching the telescope to the tripod for positioning the telescope, the motorized mount comprising:

a base fixedly attached to the tripod;

20 a fork pivotally attached to the base via a fork pivot to facilitate movement of the telescope in azimuth, the telescope being pivotally attached to the fork to facilitate movement of the telescope in altitude;

an azimuth motor attached to the base and coupled to rotate the fork;

25 an altitude motor attached to the fork and coupled to rotate the telescope;

a cable extending from the base to the altitude motor for providing electrical communication to the altitude motor;

a base stop formed to the base;

a fork stop formed to the fork;

30 an intermediate stop configured to rotate independently of the base and the fork; and

35 wherein the fork stop abuts the intermediate stop and the intermediate stop abuts the base stop when the fork is rotated less than two revolutions with respect to the base, to limit wrapping of the cable around the fork pivot.

1 36132/NEC/M618

48. The telescope system as recited in claim 47, wherein
the fork stop comprises a post formed upon the fork and extending
5 downwardly therefrom, and the base stop comprises a post formed
to the base and extending upwardly therefrom.

49. The telescope system as recited in claim 47, wherein
the intermediate stop is configured to pivot about the fork
10 pivot.

50. The telescope system as recited in claim 47, wherein
the intermediate stop comprises a lever pivotally attached to the
fork pivot.
15

51. A motorized mount for attaching a telescope of the type
commonly used to observe/photograph celestial objects to a tripod
for positioning the telescope, the motorized mount comprising:

a base fixedly attachable to a tripod;
20 a fork pivotally attached to the base via a fork pivot
to facilitate movement of the telescope in azimuth, the telescope
being pivotally attached to the fork to facilitate movement of
the telescope in altitude;

an azimuth motor attached to the base and coupled to
25 rotate the fork;

an altitude motor attached to the fork and coupled to
rotate the telescope;

a cable extending from the base to the altitude motor for
providing electrical communication to the altitude motor;

30 a base stop formed to the base;

a fork stop formed to the fork;

an intermediate stop configured to rotate independently
of the base and the fork; and

wherein the fork stop abuts the intermediate stop and
35 the intermediate stop abuts the base stop when the fork is

36132/NEC/M618

rotated less than two revolutions with respect to the base, to limit wrapping of the cable around the fork pivot.

52. The motorized mount as recited in claim 51, wherein the fork stop comprises a post formed upon the fork and extending downwardly therefrom, and the base stop comprises a post formed to the base and extending upwardly therefrom.

53. The motorized mount as recited in claim 51, wherein the intermediate stop is configured to pivot about the fork pivot.

54. The motorized mount as recited in claim 51, wherein the intermediate stop comprises a lever pivotally attached to the fork pivot.

1 36132/NEC/M618

ABSTRACT

5 TELESCOPE SYSTEM HAVING AN INTELLIGENT MOTOR CONTROLLER

10 A telescope system has an intelligent motor controller for accurately controlling telescope position to facilitate location of celestial objects and to precisely control the speed at which the telescope moves to facilitate tracking of celestial objects.

15 An optical encoder utilizes two photodetectors to provide enhanced servo control of the telescope positioning motors, a calibration circuit eliminates a need to test LED's during assembly of the optical encoder and a brushless mount provides electrical communication to an altitude drive motor located in a fork thereof in a manner which mitigates problems due to undesirable wrapping of an electrical cable around the mount as the mount rotates in azimuth.

20 NEC/mg

MG IRV1030277.1--*-10/25/99 4:24 PM

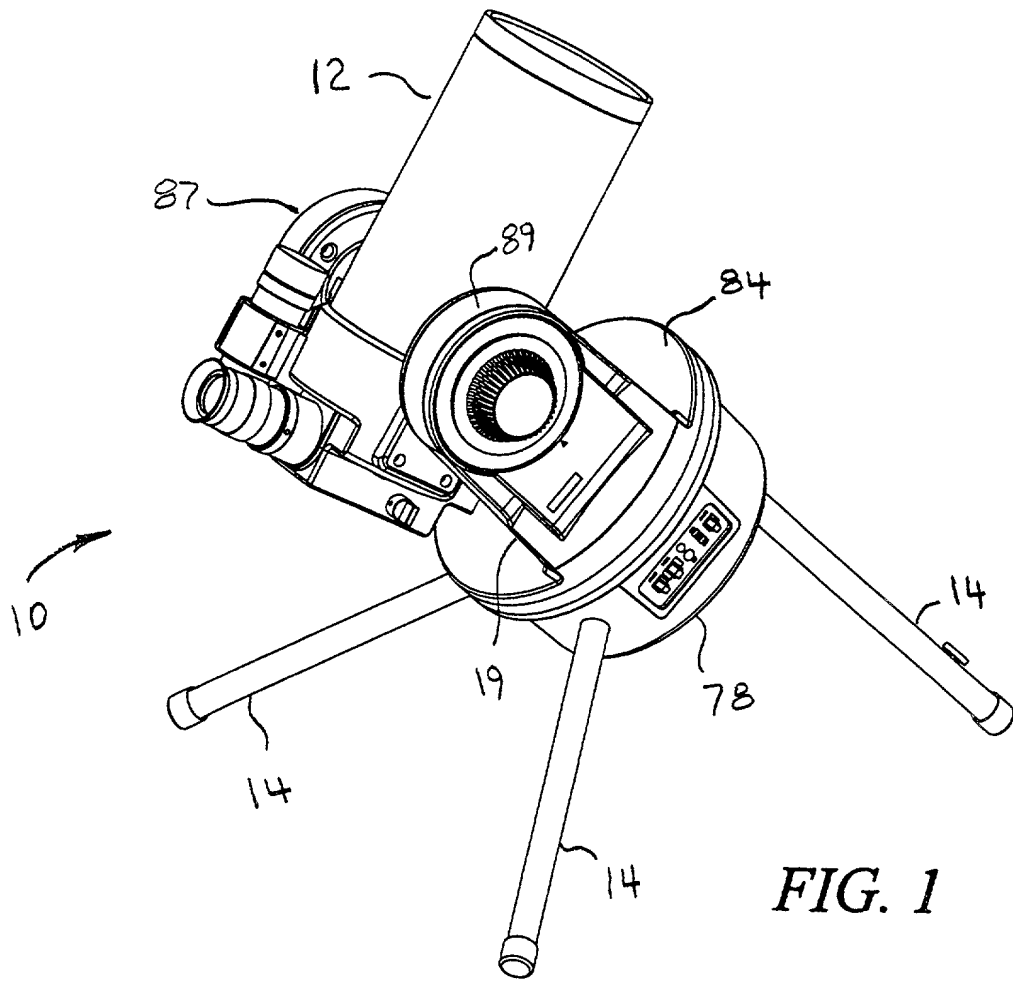


FIG. 1

FIG. 2

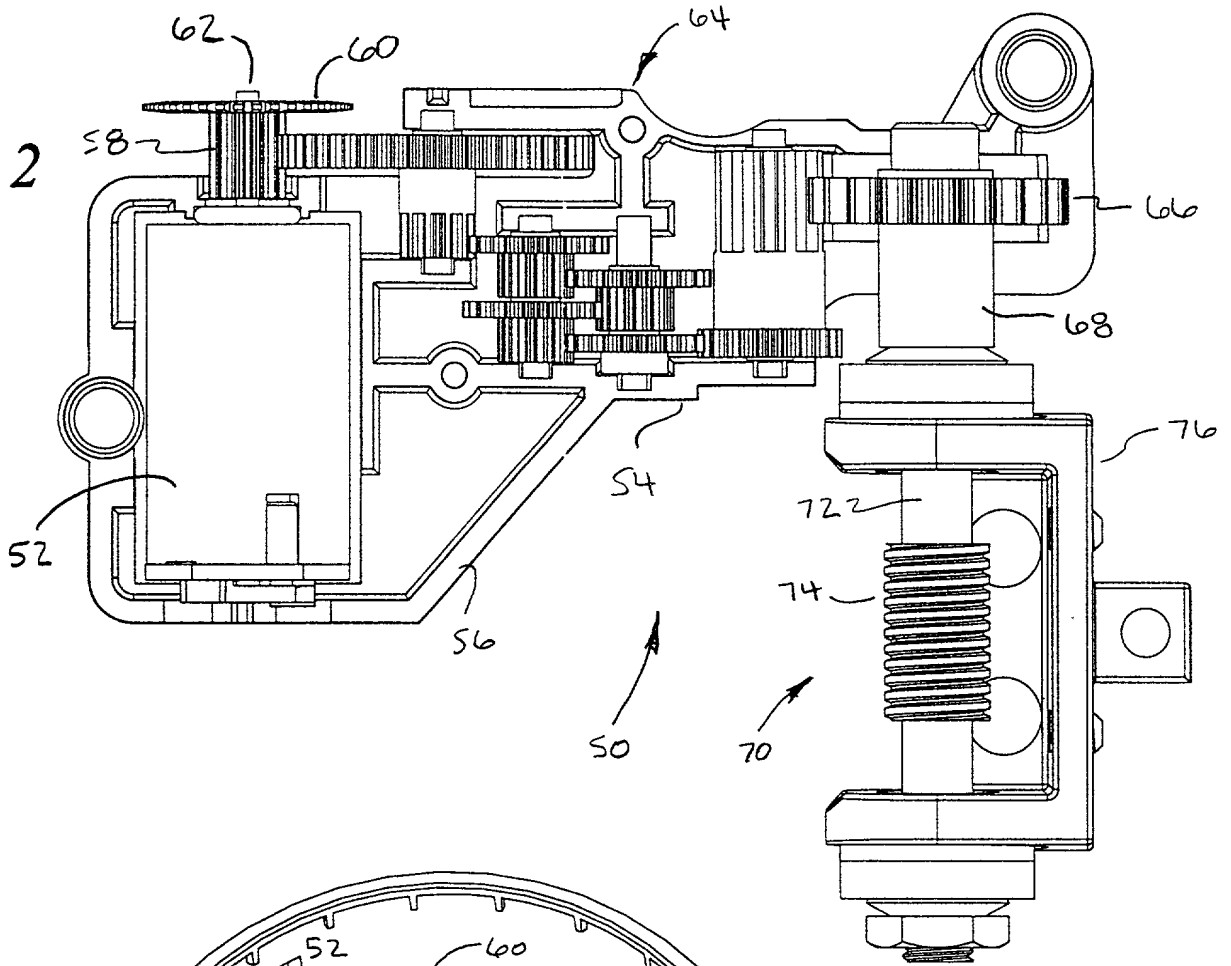
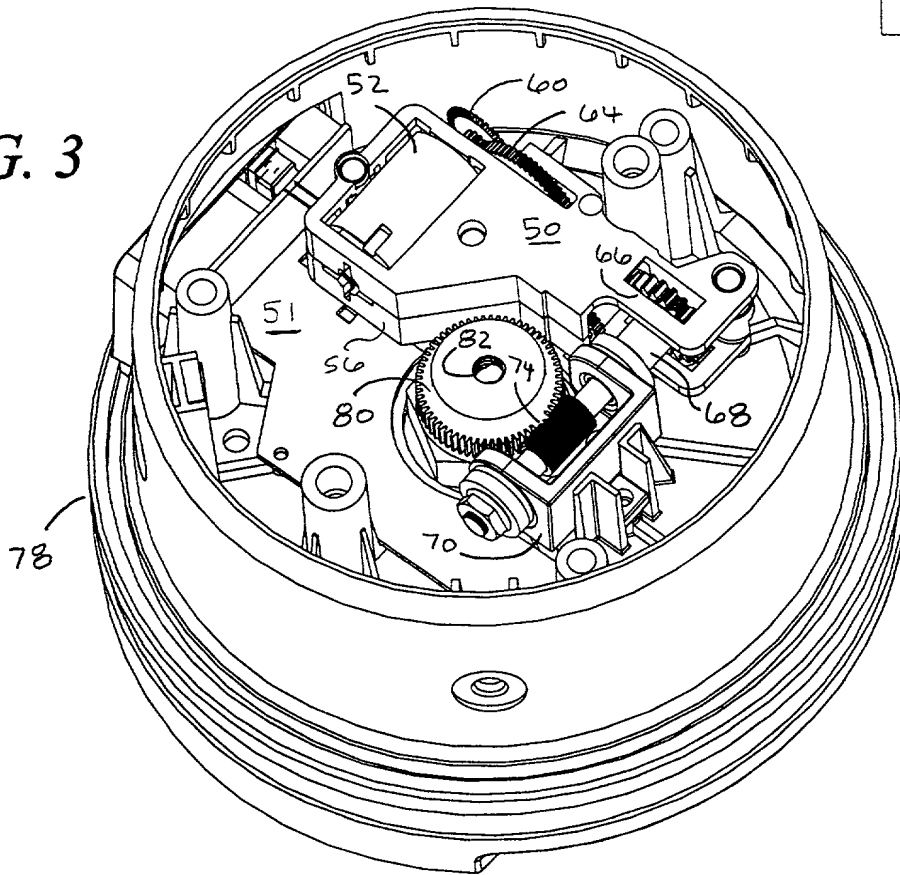


FIG. 3



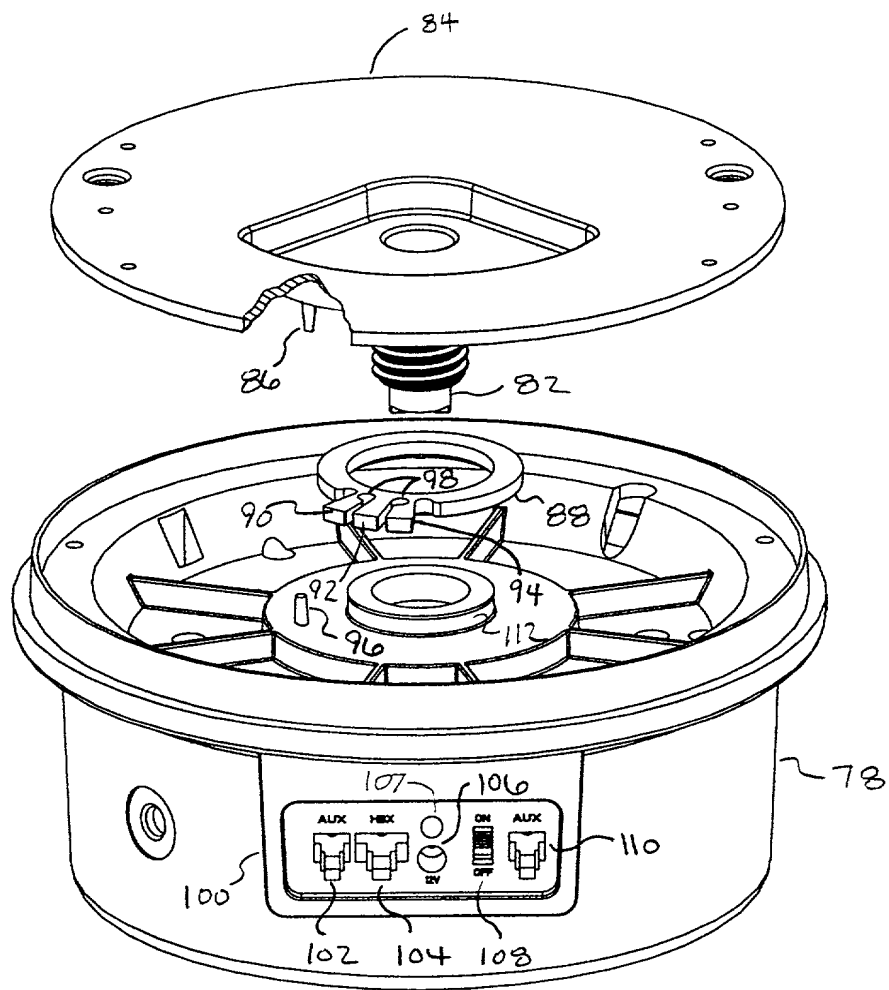


FIG. 4

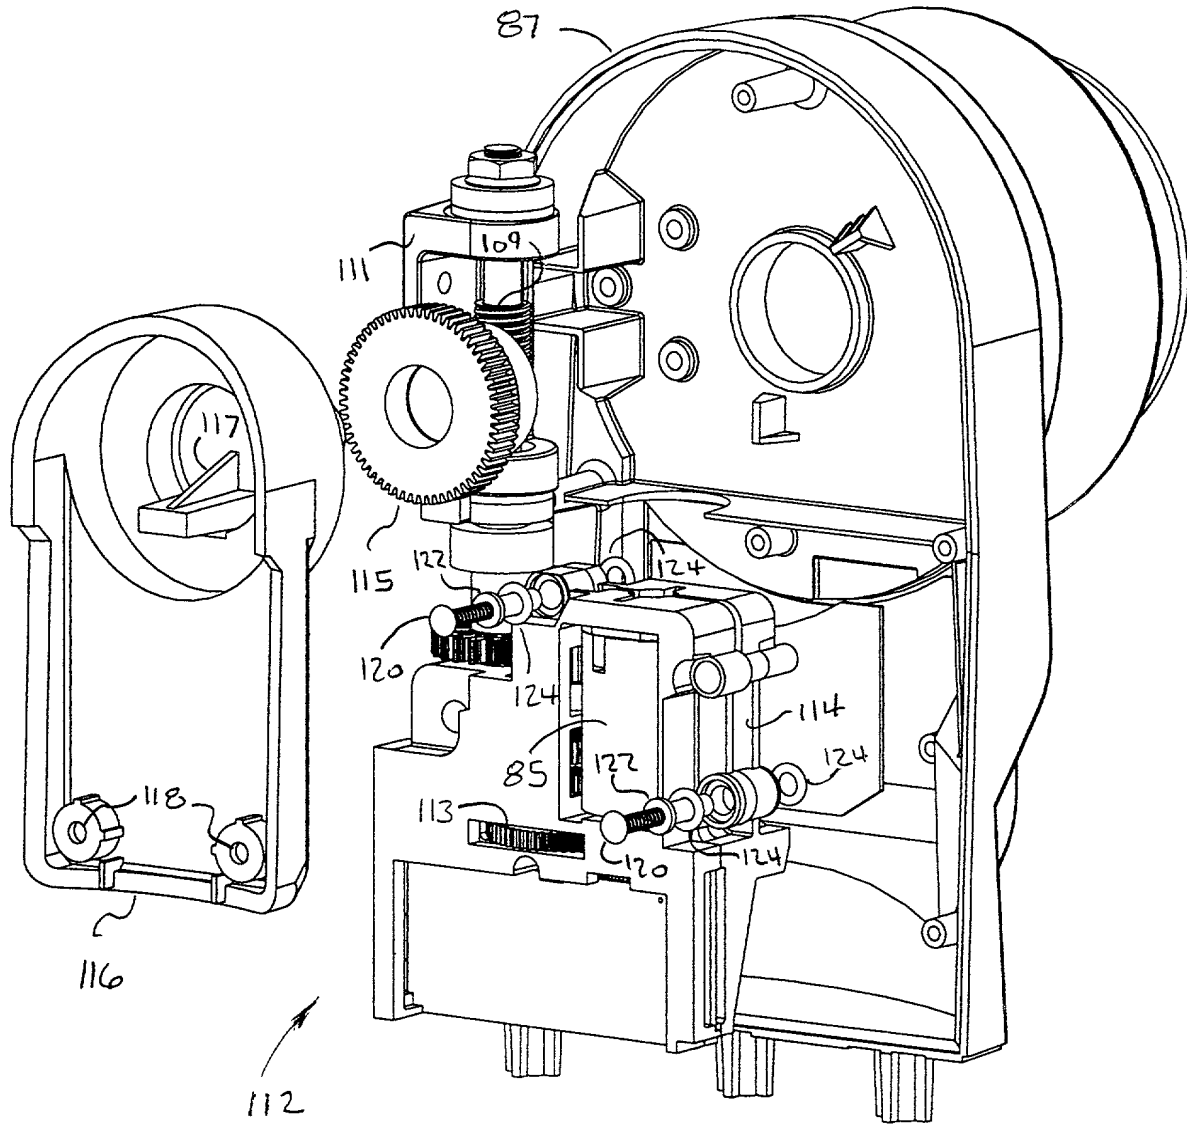


FIG. 5

663207 "SEE 2450

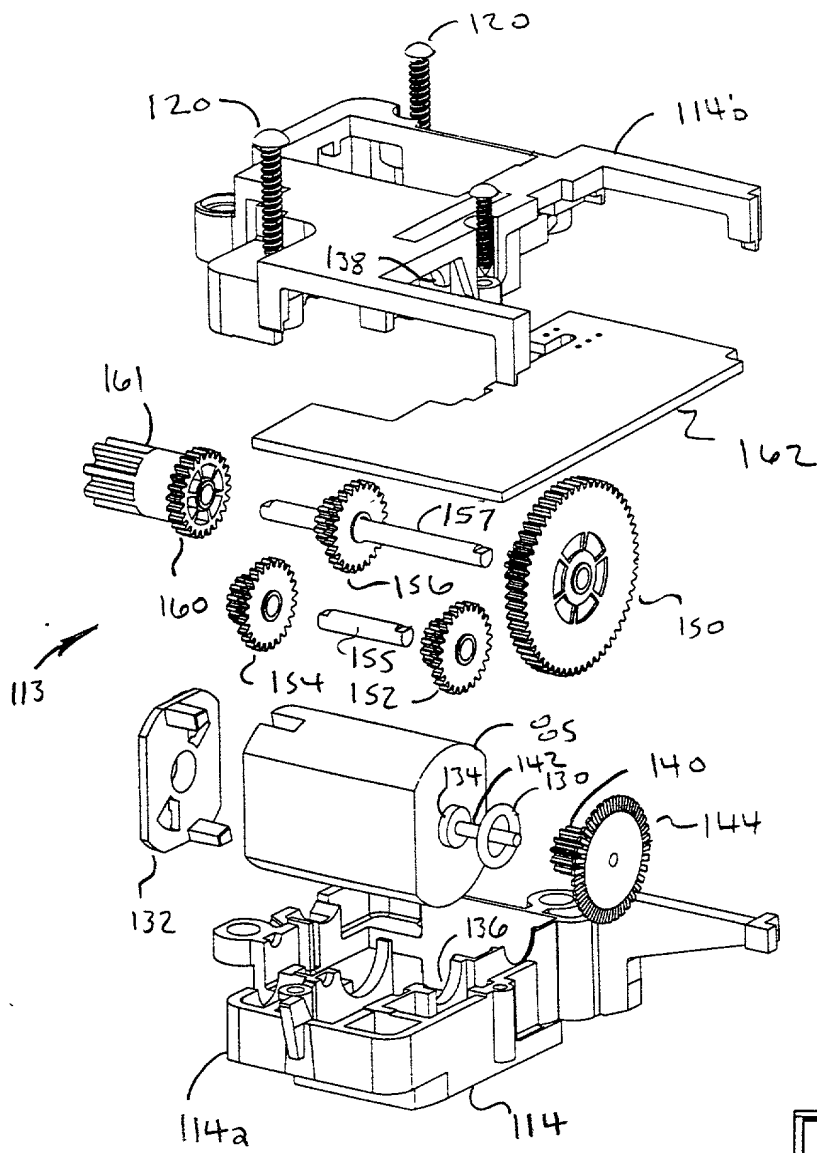
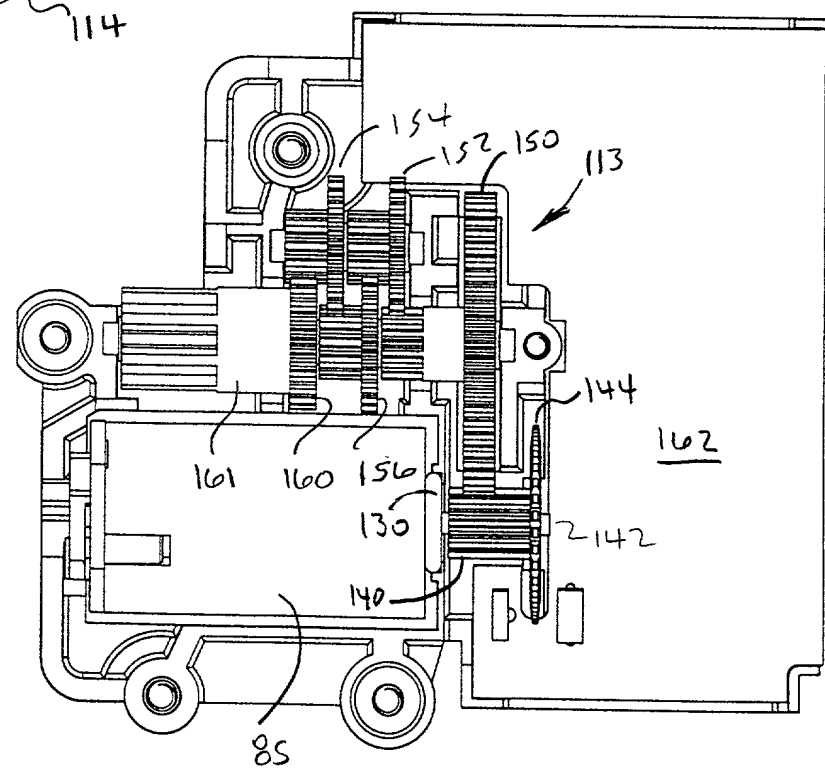


FIG. 6

FIG. 7



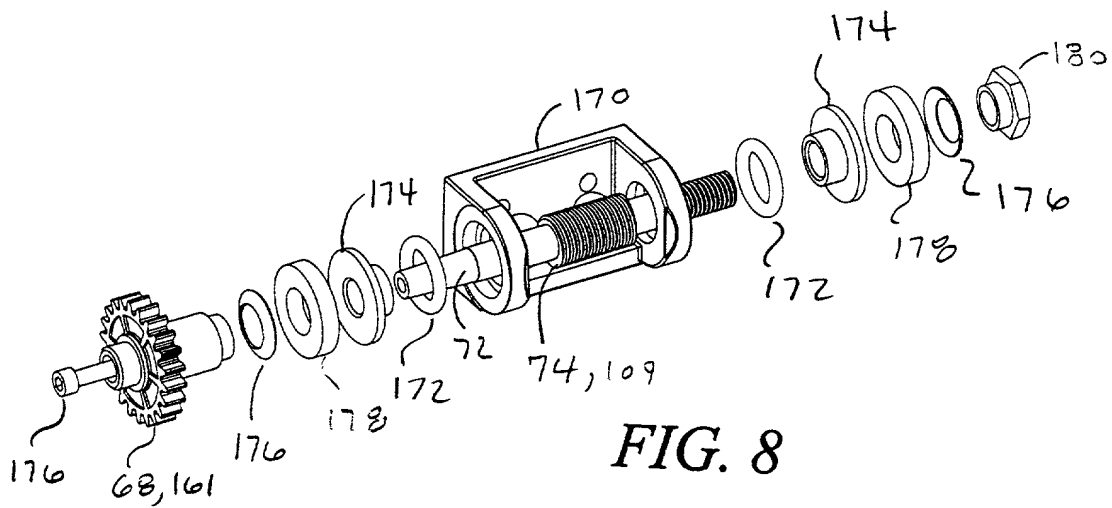


FIG. 8



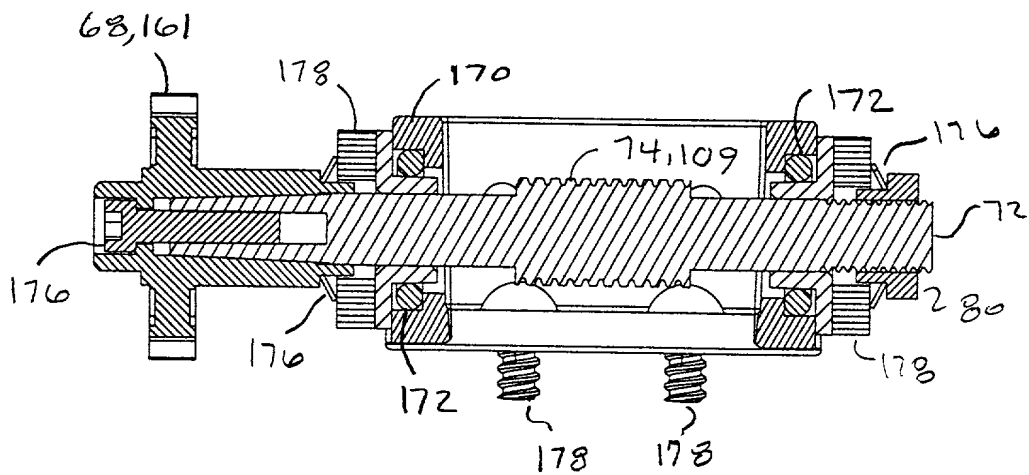


FIG. 9

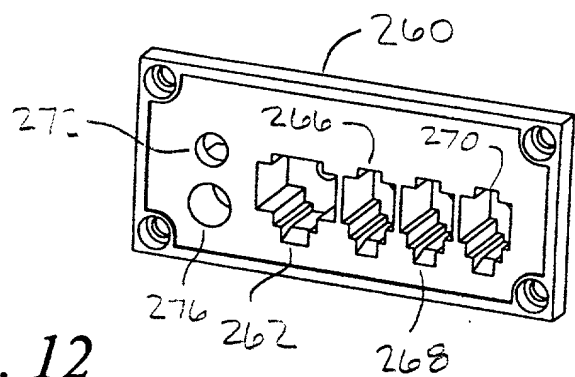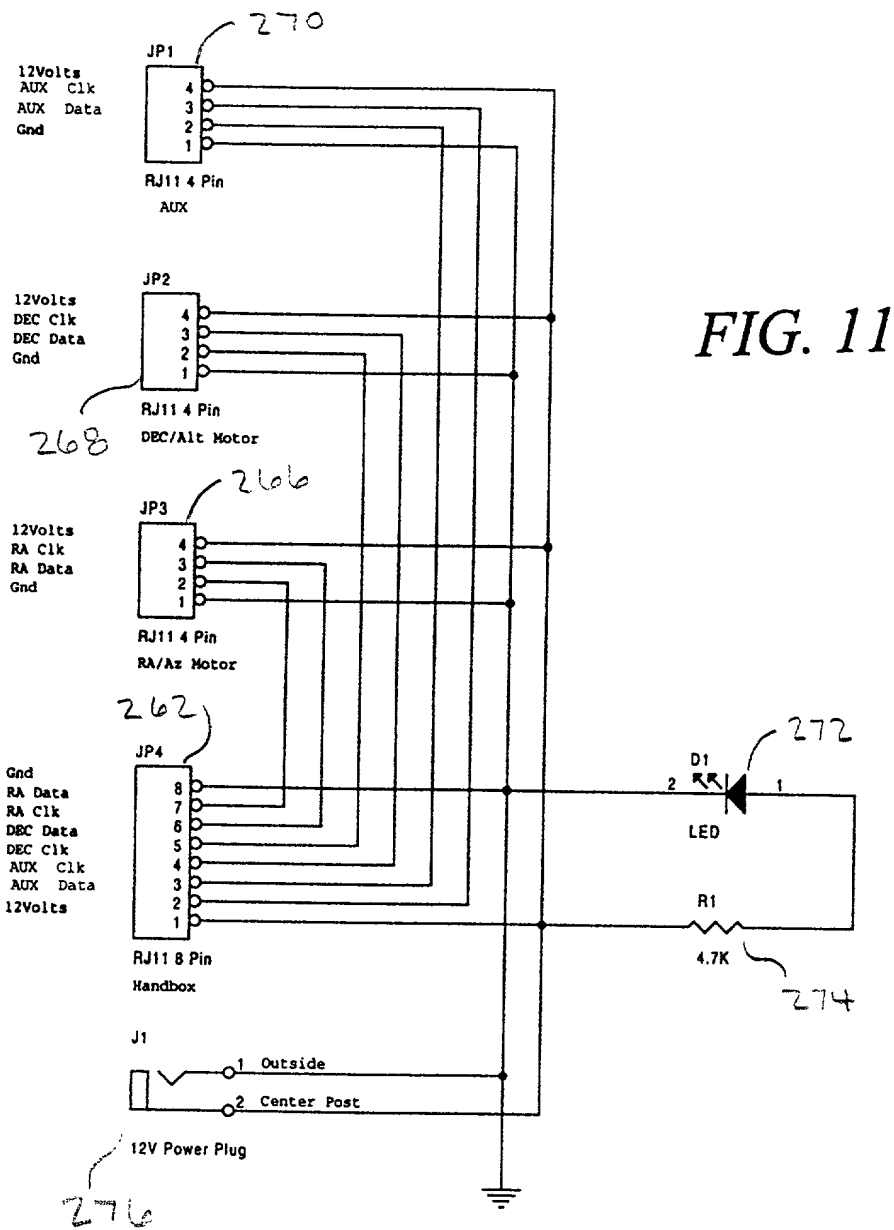

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATIONS**

PATENT

Docket No. : 36132/JWE/M618

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled TELESCOPE SYSTEM HAVING AN INTELLIGENT MOTOR CONTROLLER, the specification of which is attached hereto unless the following is checked:

___ was filed on ___ as United States Application Number or PCT International Application Number ___ and was amended on ___ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of the foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

| <u>Application Number</u> | <u>Country</u> | <u>Filing Date (day/month/year)</u> | <u>Priority Claimed</u> |
|---------------------------|----------------|-------------------------------------|-------------------------|
|---------------------------|----------------|-------------------------------------|-------------------------|

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

| <u>Application Number</u> | <u>Filing Date</u> |
|---------------------------|--------------------|
|---------------------------|--------------------|

| | |
|------------|------------------|
| 60/105,660 | October 26, 1998 |
|------------|------------------|

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

| <u>Application Number</u> | <u>Filing Date</u> | <u>Patented/Pending/Abandoned</u> |
|---------------------------|--------------------|-----------------------------------|
|---------------------------|--------------------|-----------------------------------|

POWER OF ATTORNEY: I hereby appoint the following attorneys and agents of the law firm CHRISTIE, PARKER & HALE, LLP to prosecute this application and any international application under the Patent Cooperation Treaty based on it and to transact all business in the U.S. Patent and Trademark Office connected with either of them in accordance with instructions from the assignee of the entire interest in this application;

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATIONS**

Docket No. 36132/JWE/M618

or from the first or sole inventor named below in the event the application is not assigned; or from __ in the event the power granted herein is for an application filed on behalf of a foreign attorney or agent.


| | | | | | |
|------------------------|----------|------------------------|----------|---------------------|------------|
| R. W. Johnston | (17,968) | John D. Carpenter | (34,133) | Lucinda G. Auciello | (42,270) |
| D. Bruce Prout | (20,958) | David A. Plumley | (37,208) | Norman E. Carte | (30,455) |
| Hayden A. Carney | (22,653) | Wesley W. Monroe | (39,778) | Joel A. Kauth | (41,886) |
| Richard J. Ward, Jr. | (24,187) | John W. Eldredge | (37,613) | Patrick Y. Ikehara | (42,681) |
| Russell R. Palmer, Jr. | (22,994) | Gregory S. Lampert | (35,581) | Mark Garscia | (31,953) |
| LeRoy T. Rahn | (20,356) | Grant T. Langton | (39,739) | Gary J. Nelson | (44,257) |
| Richard D. Seibel | (22,134) | Constantine Marantidis | (39,759) | Raymond R. Tabandeh | (43,945) |
| Walter G. Maxwell | (25,355) | Daniel R. Kimbell | (34,849) | Phuong-Quan Hoang | (41,839) |
| William P. Christie | (29,371) | Craig A. Gelfound | (41,032) | Jun-Young E. Jeon | (43,693) |
| David A. Dillard | (30,831) | Syed A. Hasan | (41,057) | Kathy Mojibi | (41,409) |
| Thomas J. Daly | (32,213) | Kathleen M. Olster | (42,052) | Cynthia A. Bonner | (P-44,548) |
| Vincent G. Gioia | (19,959) | Daniel M. Cavanagh | (41,661) | Marc A. Karish | (P-44,816) |
| Edward R. Schwartz | (31,135) | Molly A. Holman | (40,022) | | |


The authority under this Power of Attorney of each person named above shall automatically terminate and be revoked upon such person ceasing to be a member or associate of or of counsel to that law firm.


DIRECT TELEPHONE CALLS TO : John W. Eldredge, 626/795-9900

**SEND CORRESPONDENCE TO : CHRISTIE, PARKER & HALE, LLP
P.O. Box 7068, Pasadena, CA 91109-7068**

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

| | | |
|---|--|----------------------------|
| Full name of sole or first joint inventor Kenneth W. Baun | Inventor's signature  | Date 10/12/99 |
| Residence and Post Office Address 21292 Stonetower Lane, Trabuco Canyon, California 92679 | | Citizenship U.S. |

| | | |
|---|--|----------------------------|
| Full name of fifth joint inventor Brian G. Tingey | Inventor's signature  | Date 12 OCT. 99 |
| Residence and Post Office Address 18246 Cabrillo Court, Fountain Valley, California 92708 | | Citizenship U.S. |

| | | |
|--|--|----------------------------|
| Full name of seventh joint inventor Stanley H. Dewan | Inventor's signature  | Date 10/12/99 |
| Residence and Post Office Address 1 Calle San Luis Rey, Rancho Santa Margarita, California 92688 | | Citizenship U.S. |